
# 1L1200SRB



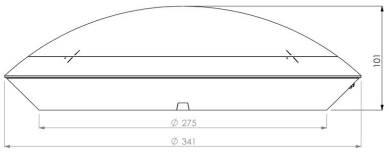


## Specifications

| | |
|---|---|
| Family | SERIES 110 CIRCUM |
| Application | General Lighting |
| Light source | 12W LED |
| Functionality | radar , light sensor |
| LoRa node | no |
| Supply | 230V AC/DC |
| Color Temperature (K) | 4000K |
| Luminous flux (lm) | 1300lm (100%), 1040lm (80%), 780lm (60%), 520lm (40%), 260lm (20%) |
| Ambient temperature (C) | gemiddeld tussen -25 en +25 |
| Color housing | black, RAL 7021 |
| Color rendering index (Ra) | >80 |
| Weight (gr) | 1490 |
| Sizes of packaging (LxWxH) | 350 x 370 x 105 mm |
| Impact resistance | 3 x IK10 (65 joules) |
| Power factor | 0.9 |
| Optics | diffusor |
| Motion sensor | yes |
| Assembly | Surface mount , Ceiling , Wall |
| Material housing | polycarbonate |
| Ingress protection | IP65 |
| Power consumption | 16W (100%), 12,5W (80%), 9,5W (60%), 6,5W (40%), 3,6W (20%) |
| Insulation class | Klasse II |
| Light sensor | yes |
| Details/particulars | lifetime >100.000 hrs (L80/B10) |
| EAN | 8718309389109 |

*We reserve the right to alter specifications.*

Datum download PDF: 30-10-2026

HBI Bisscheroux | Hofdwarsweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com