

SPACING TABLE 3 HOURS EMERGENCY DURATION

# SERIE 200 POLAREM

Ceiling Corridor (CC)




Luminous flux: 570 lm

Emergency lighting factor: 0.21

Emergency luminous flux: 122 lm



HBI Bisscheroux B.V. 2L05--CC--- Polarem CC / LVK (polair)

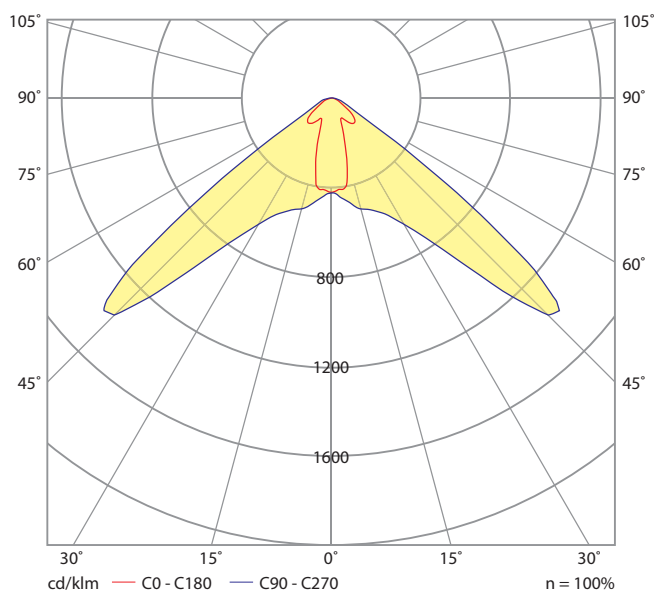

## 1 lux - 3 hours duration

Mounting height (meters)	Diagram 1	Diagram 2	Diagram 3	Diagram 4	Diagram 5
2.50	3.8	8.2	7.3	6.5	2.5
3.00	4.3	9.3	8.0	7.0	1.4
3.50	4.9	10.6	7.4	6.2	1.4
4.00	5.4	11.7	7.9	5.7	1.4
4.50	5.9	12.8	8.4	3.9	1.4
5.00	6.4	13.9	8.9	3.9	1.4
6.00	7.2	16.0	10.0	4.0	1.4
7.00	7.8	17.9	11.0	4.1	0.9