

SPACING TABLE 1 HOUR EMERGENCY DURATION

# SERIE 770 SEPTAGEM-S LOW BAY




Luminous flux: 489 lm

Emergency lighting factor: 1.00

Emergency luminous flux: 489 lm



HBI Bisscheroux bv, 770 Septagem / low bay (polair)

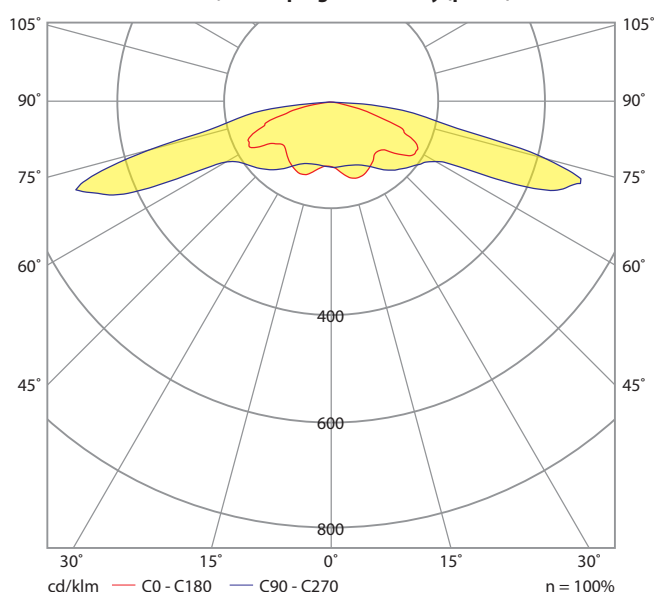

Code no.:

- 7SL0404W
- 7SL0404B
- 7SY0404W
- 7SY0404B

## 1 lux - 1 hour duration - low bay

Mounting height (meters)	Corridor			Open area	
	Diagram 1	Diagram 2	Diagram 3	Diagram 4	Diagram 5
2.50	8.1	19.0	16.0	13.2	5.4
3.00	8.3	21.0	17.4	14.2	5.7
3.50	6.5	22.5	18.7	15.2	5.9
4.00	6.3	21.9	18.1	15.8	5.8
4.50	6.1	22.0	17.4	16.1	4.9
5.00	5.9	21.3	17.3	16.0	4.6
6.00	5.1	17.5	16.0	13.7	4.3
7.00	3.0	16.8	14.8	12.9	3.7